

## HP1290i PRODUCT SPECIFICATIONS

System Type	12", coaxial, open-ceiling, high SPL (150 W transformer for 25, 70.7, and 100 V or transformer bypass)
Impedance (Nominal) <sup>1</sup>	8 Ω
Sensitivity dB @ 2.83 V / 1 M	96 dB
Sensitivity dB @ 1 W / 1 M <sup>2</sup>	96 dB
Frequency Response (±3 dB) <sup>3</sup>	77 Hz - 19 kHz
Frequency Response (±10 dB) <sup>3</sup>	59 Hz - 22 kHz
Max. Program Power <sup>4</sup>	300 W
Max. Continuous Power RMS <sup>5</sup>	150 W
Max. Power SPL @ 1 M <sup>6</sup>	118 dB
Coverage Angle (±6 dB @ 2 kHz)	60°
Coverage Angle (±6 dB @ 10 kHz)	85°
Coverage Angle (Avg. 2-10 kHz)	100°
Directivity Factor (Q)	6.2 (Avg. 100 Hz - 10 kHz)   16.2 (2 kHz)
Directivity Index (DI)	6.7 dB (Avg. 100 Hz - 10 kHz)   12.1 dB (2 kHz)
Tap Selector	Five-position rotary switch with transformer bypass position
Transducer: Low-Frequency Driver	305 mm (12") treated fiber cone, treated cloth surround
Transducer: High-Frequency Driver	35 mm (1.375") Mylar compression driver with waveguide
Low-Frequency Voice Coil	50.8 mm   2"
Crossover Frequency	2.2 kHz
Network Type: Low Pass	24 dB per octave, 4th order
Network Type: High Pass	24 dB per octave, 4th order
Enclosure Material	Injection molded ABS
Grille	Steel with powder-coat finish
Inputs	4-pin, 5.08 mm Euroblock for individual or daisy chain connection
Height	579.1 mm   22.8"
Diameter	528.3 mm   20.8"
Weight	15.9 kg   35 lbs
Shipping Weight	20.4 kg   44.9 lbs
Packaging	One per box
Included Accessories	Hanging hardware, Euroblock connector and terminal weather boot, main and safety cables with SpeedClamp™
Optional Accessories	Surface mount bracket (AC-HP-SM1290)
Certifications	CE, RoHS, UL 2239, UL 1480A



## Description

The HP1290i is a 12", coaxial, two-way, hanging speaker with a surface-mount option and a proprietary BroadBeamHP® waveguide. Engineered to deliver true high SPL performance, the HP1290i incorporates a 12" treated fiber cone and one coaxially-mounted 35 mm (1.375") mylar compression driver. The result is a pendant-mount speaker with maximum efficiency (96 dB 1 W/ 1 M) and an extended frequency response from 59 Hz - 22 kHz (±10 dB). For lasting performance and maximum rigidity, the enclosure is made from injection-molded, glass-filled ABS.

UL2239 rated mounting hardware is included and features hanging and safety cables, Euroblock connector and terminal weather boot. For easy ordering, stocking and installation, every speaker is equipped with a five-position tap switch for 25, 70.7, and 100 V applications with transformer bypass position. For surface-mount applications, SoundTube offers an optional surface-mount adapter (AC-HP-SM1290).

## Features

- Patented BroadBeamHP® waveguide technology delivers a consistent dispersion pattern (2-10 kHz, independently verified) for maximum coverage area per speaker
- One 12" (305 mm) treated fiber cone with a cloth surround concentrically mounted to a 1.375" (35 mm) Mylar compression driver with waveguide
- Weatherized components for both indoor/outdoor applications
- High SPL, high-efficiency system for the sound reinforcement and PA markets
- An impressive 2 cubic foot, ported ZeroReflection™ enclosure for added bass response, rigidity and optimal sound reproduction
- Easy-access, five-position tap switch for 25, 70.7, and 100 V applications with transformer bypass position
- High efficiency (96 dB) for reduced amplification costs and max output (118 dB SPL) for distributed or 8 Ω systems
- Low insertion loss 150 W transformer
- UL 1480A and UL 2239 (hanging hardware) approved
- High quality black or white paint finish. Custom colors available
- Included accessories: impact-resistant steel grille, hanging hardware, Euroblock connector, terminal weather boot
- Optional accessory: surface-mount bracket (AC-HP-SM1290)

<sup>1</sup> Impedance listed per IEC 60268-5 with a minimum less than 80% the nominal impedance

<sup>2</sup> 1 W/1 M sensitivity determined using nominal impedance

<sup>3</sup> Frequency response measured in half or full space as dictated by speaker mounting configuration

<sup>4</sup> Max program power is 3 dB above max continuous power

<sup>5</sup> Continuous power rating, EIA-426-B test

<sup>6</sup> Max output based on max continuous power

## Transformer Taps

70.7 V	Output	100 V	Output	25 V	Output
150 W	118 dB	150 W	118 dB	19 W	109 dB
75 W	115 dB	75 W	115 dB	9.5 W	106 dB
38 W	112 dB	38 W	112 dB	4.8 W	103 dB
19 W	109 dB			2.4 W	100 dB

## Applications

Developed specifically for true PA and sound reinforcement applications including convention centers, ballrooms, arenas, stadiums, gymnasiums, ice rinks, nightclubs and other open-ceiling or outdoor applications where rapid installation, high SPL and lasting durability are required.

## Patented Technologies

SoundTube Entertainment constantly develops new technologies which enhance audio product performance. SoundTube Entertainment innovations are protected by multiple U.S. and international patents, which explicitly cover SoundTube dome, enclosure and dispersion technologies. SoundTube actively defends its patents in order to protect SoundTube resellers and end-users.

## BroadBeam® Wide Dispersion Technology

SoundTube's proprietary BroadBeam technology incorporates a high-frequency waveguide mated to a 1" convex aluminum tweeter. BroadBeam waveguide technology delivers a consistent BroadBeam dispersion pattern across the upper registers of the frequency spectrum. The result is an audio system requiring fewer speakers with higher intelligibility, offering reduced power needs, shorter installation time and cost savings on shipping and labor.

## Technical Data and Specification Tools

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data is available from SoundTube Entertainment or at [www.soundtube.com](http://www.soundtube.com).

Technical data and downloads include:

- EASE™ data - 3-D polar plots.
- EASE™ Address - 2-D modeling for distributed systems
- AutoDesk® Revit® software
- Tech Sheets - technical information and architectural specs for system engineers
- SoundTubeSPEC™ - Proprietary speaker placement software

## Independent Data Acquisition and Verification

All data for SoundTube speakers is independently collected from and verified by NWAALabs ([www.nwaalabs.com](http://www.nwaalabs.com)) using their proprietary MACH testing system. All data is collected and analyzed according to ASTM, ISO and AES

standards using EASERA, TEF and MLSSA. Full balloon data including both phase and magnitude is compiled into a variety of formats including EASE 4.x, GLL and CLF.

## Architectural Specifications

The loudspeaker shall consist of a 305 mm (12") low-frequency transducer and one 35 mm (1.375") high-frequency transducer with a frequency dividing network installed in a ported enclosure. The low-frequency voice coil diameter shall be 50.8 mm (2").

Performance specifications of a typical production unit shall be as follows: Usable frequency range shall extend from 59 Hz - 22 kHz ( $\pm 10$  dB). The loudspeaker shall be available with selectable 25, 70.7, 100 V tap switch with transformer bypass position. The frequency dividing network shall have a crossover frequency of 2.2 kHz. Rated power capacity of the components and network shall be at least 150 W continuous RMS and conform to EIA-426-B testing. Maximum continuous output at 1 meter shall be at least 118 dB.

The low-frequency transducer shall have a treated fiber cone with a treated cloth surround. The high-frequency transducer shall be constructed of Mylar material.

Installation for the speaker shall be by galvanized steel cable affixed to the speaker chassis via an integrated snap hook. For safety redundancy, a secondary cable shall be included. The external wiring input connector shall be a four-pin, 5.08 mm Euroblock for 8  $\Omega$  or distributed systems and shall accept 10 - 22-gauge wire. The unit shall be for indoor and outdoor applications and have a weather-resistant boot covering all wire connections. The system shall ship complete with hanging and safety cables, Euroblock connector and terminal weather boot. The speaker has an optional surface-mount bracket (AC-HP-SM1290).

The ported enclosure shall be constructed from injection molded, glass-reinforced ABS with a total volume of 2 cubic feet. The grille shall be constructed of powder-coated steel and affix to the speaker via friction fit with two blind-mounted, radial screws.

The unit is factory preset to the 150 W setting in the 70.7 V operating mode, with a tap switch located on the front baffle of the speaker, accessible by a removable grille plug. Signal input shall be by 4-pin Euroblock connector, which accepts up to 10-gauge wire.


The system shall be the SoundTube HP1290i for both low and high impedance applications.

## SoundTube®

13720 W. 109th St.  
Lenexa, KS 66215  
Phone: 913.663.5600  
Fax: 913.663.3200  
Toll Free: 855.663.5600  
[www.soundtube.com](http://www.soundtube.com)

All SoundTube speakers come with a 5-year limited warranty and 3-year warranty on all electronics.

## Mechanical Drawings

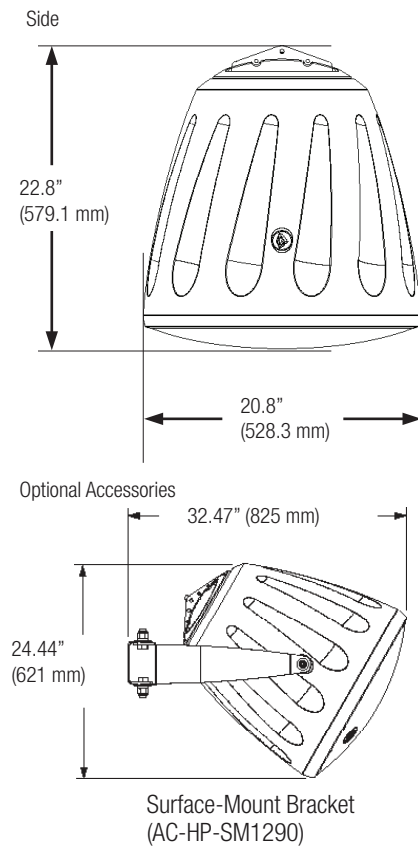


### Included Accessories




**Hanging Hardware: Main and Safety Cables w/ SpeedClamp™**  
SoundTube's hanging cable kit incorporates hanging and safety cables and fasteners for an integrated and easy-to-install system. Hanging and safety cables are infinitely adjustable to 6.1 m (20').

## Plots

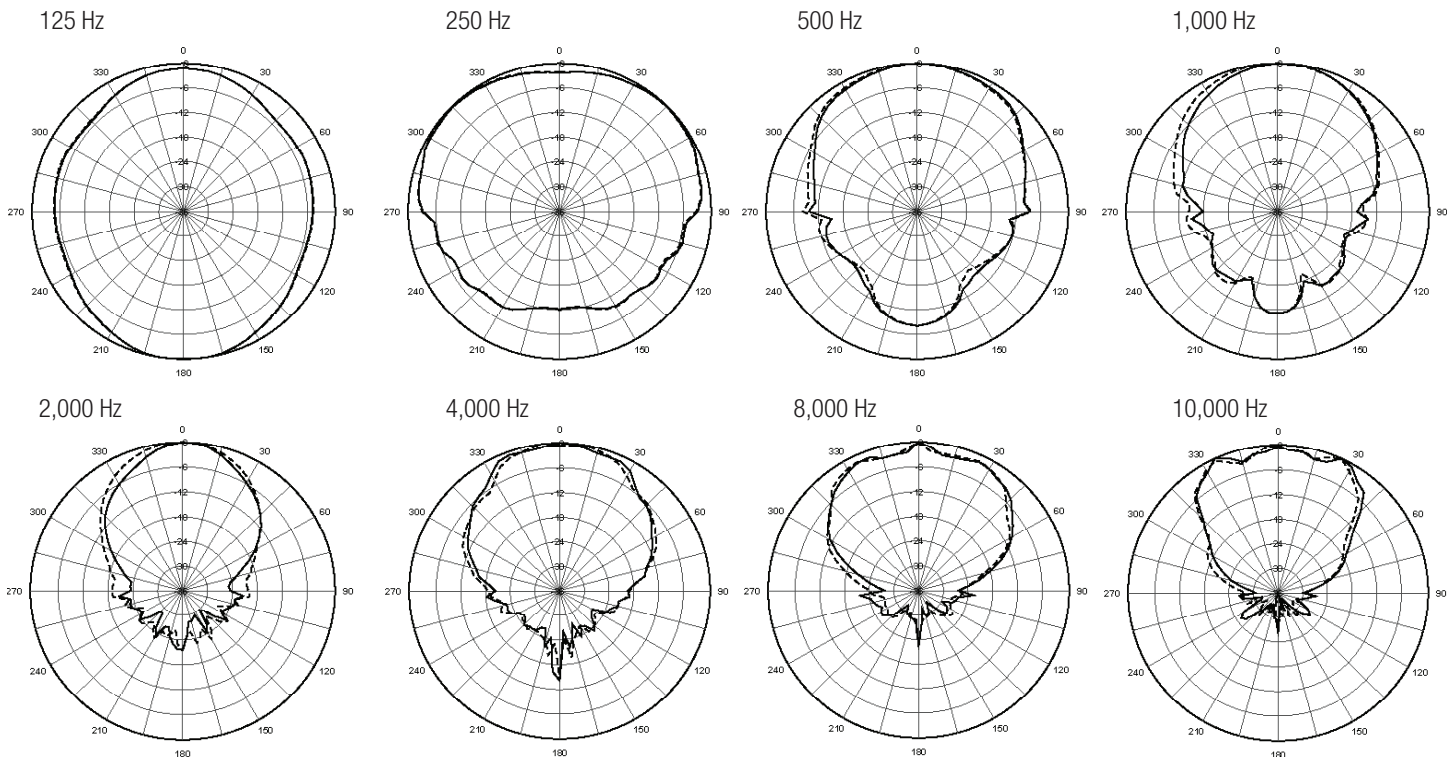


## Graphs


### Frequency Response

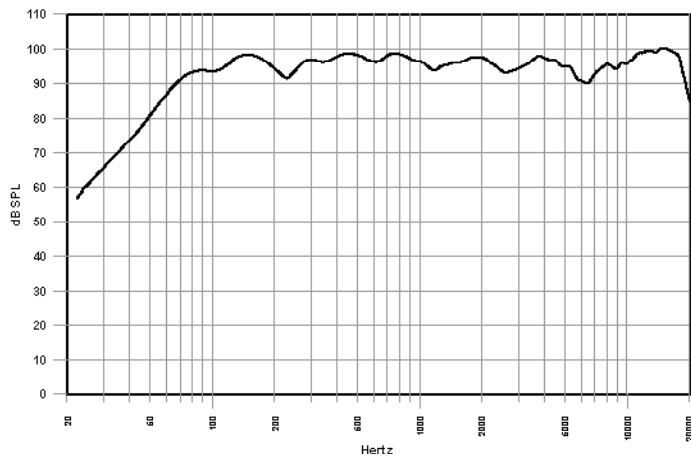

### Phase/Impedance Response

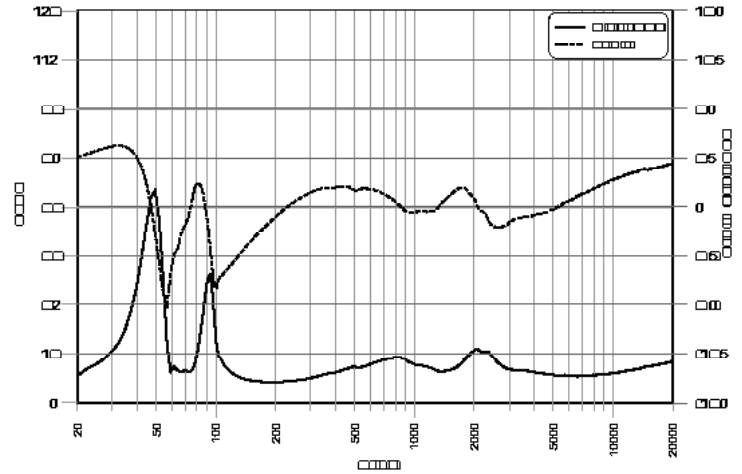

### Vertical Beamwidth

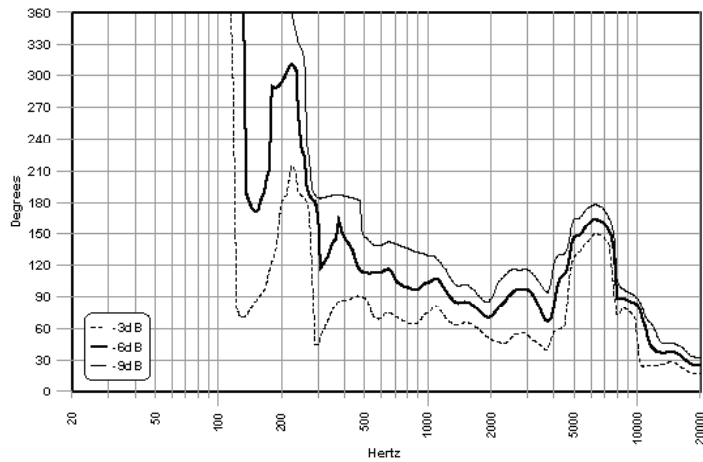

### Directivity Index (DI)

