




RS31-EZ(-T)

Install Instructions For:
RS31-EZ(-T)

Box contents

- 1 Speaker assembly
- 2 Mounting screws
- 2 Wire Nuts

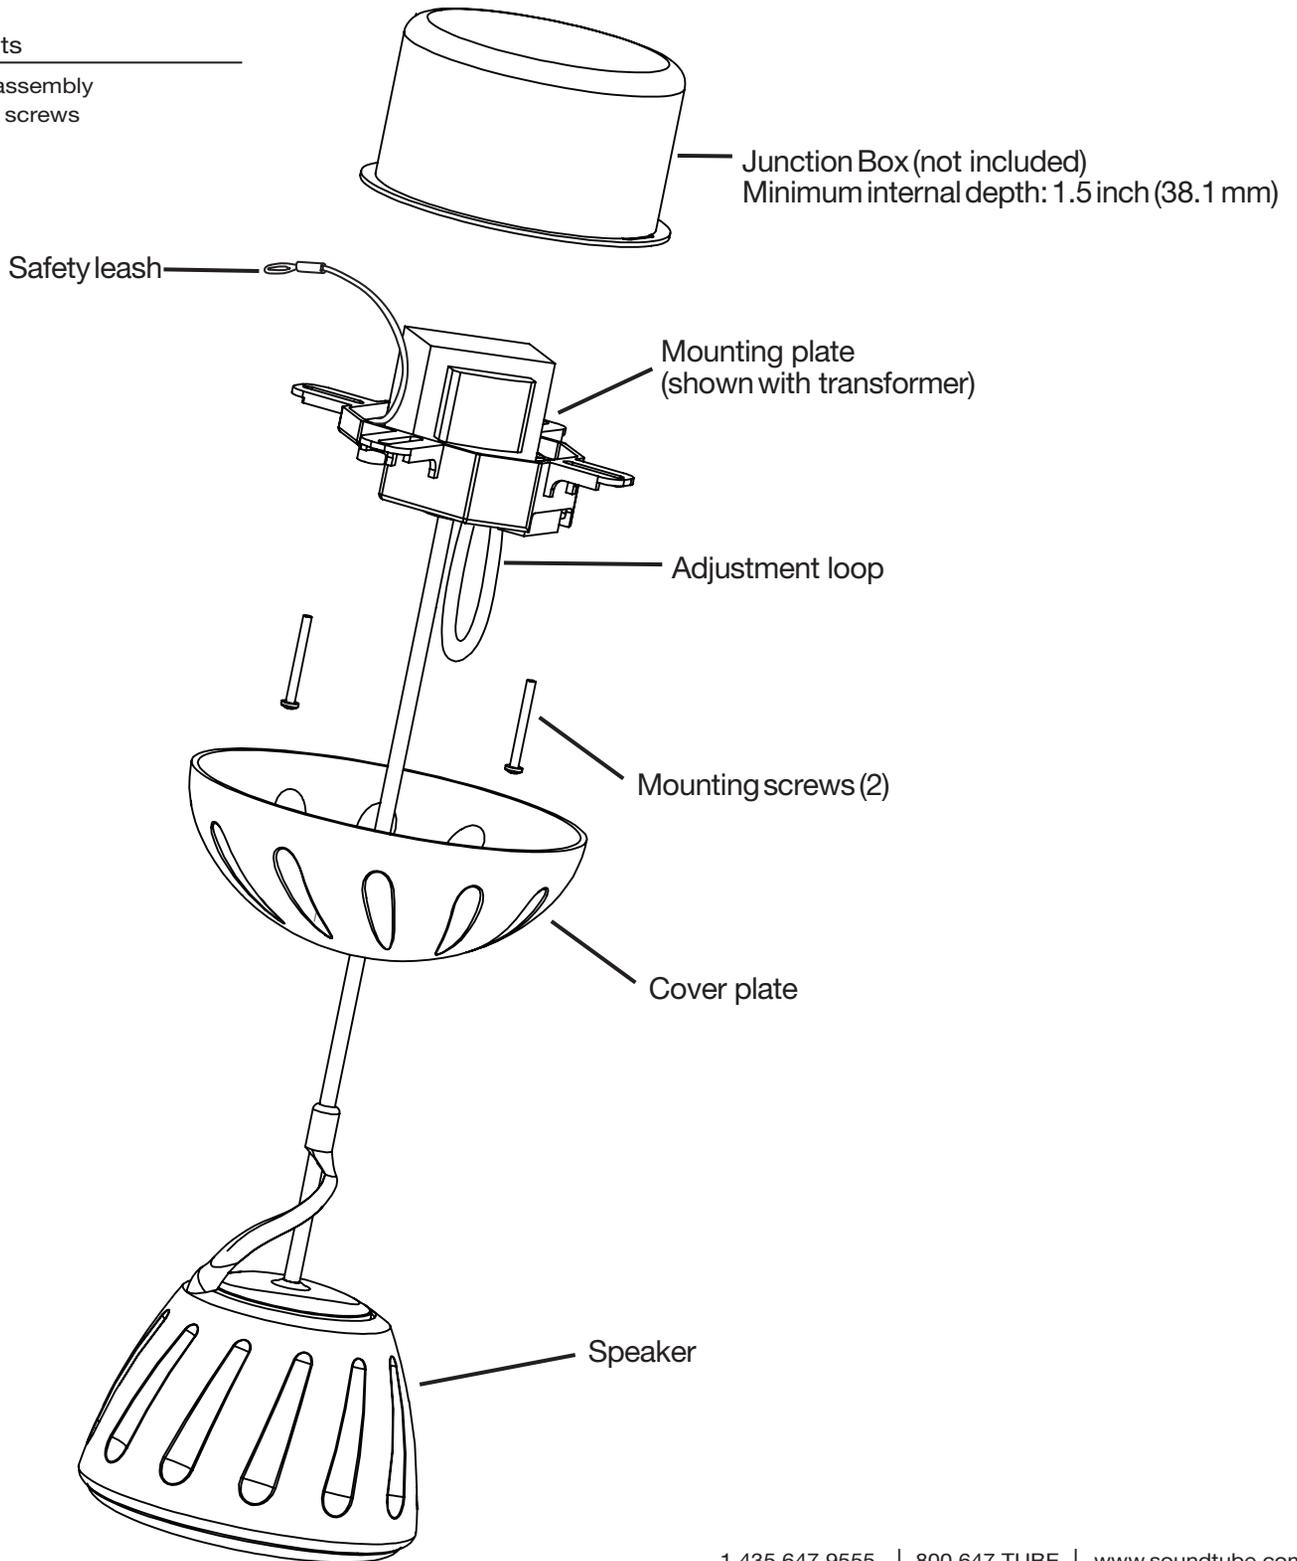

1.435.647.9555 | 800.647.TUBE | www.soundtube.com

©2012 SoundTube Entertainment, Inc. All rights reserved. PN INS-RS31-EZ Rev 03.20.19



Warning

SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.




Warning


Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.

RS31-EZ(-T)


Install Instructions For:
RS31-EZ(-T)




1. Remove speaker from box and unscrew the cover to reveal the mounting plate.




2. Feed signal wire from ceiling through the mounting plate via wire opening.




3. Where needed, connect safety leash to secure point on structure/junction box.




4. Screw mounting plate into the junction box (not included) using the mounting screws provided.




5. Connect Signal wire into terminal block




6. RS31-EZ-T wiring: Connect the negative signal wire to "com" and the positive signal wire to the desired power tap as indicated.




7. Set speaker height by adjusting speaker wire. Push wire through the central hole while pulling on the center slack line to shorten the speaker hanging height. Reverse to lengthen.



8. Move cover plate up speaker wire, begin to thread cover plate into mounting plate, leaving half an inch between cover plate and mounting surface.




9. Excess wire can be hidden inside of cover plate by wrapping excess wire clockwise and into gap between plate and surface




10. Completely thread cover plate to secure speaker.


Done.




1. Remove speaker from box and unscrew the cover to reveal the mounting plate.



2. Remove the input module mounted onto the transformer. Unscrew to remove the transformer.



3. Un-land the red and black wires from the terminal block and splice in signal wires using wire nuts.



4. Refer to steps 8-11 on page 2 to complete installation.

Done.